

The new **HZC390** S/L H-class vacuum

H-Class equipment is the legal requirement when working with high risk, non-explosive, hazardous dusts and materials, including asbestos. The HZC390 is engineered to meet this demanding standard

- Unparalleled safety with the sealed H13 filter cartridge
- Built for the Tradesman whose work brings them in contact with hazardous dusts
- Equipped with a sealed and disposable cartridge, users are able to change the filter as and when they need to
- All terrain ready, with large rear wheels and pull handle



Numatic
INTERNATIONAL

ADVANCE
PRODUCT INFORMATION

HZC390 S/L Vacuum
H-Class

ProCare
ProCare
ProCare
ProCare

HZC390_{SL} H-Class Vacuum

ProrCare
ProrCare
ProrCare
ProrCare

Unparalleled Safety

All dust is safely contained within a sealed, HEPA H13 filter cartridge, so you can breathe easy.

Built for the Tradesman

Designed, engineered and built with the tradesman in mind, the HZC390 offers a safe and convenient solution for those whose work brings them into infrequent contact with Hazardous Dusts and Materials.

Complete Ease of Use

Equipped with a sealed and disposable cartridge, users are able to change the filter as and when they need to.

Europe's No.1

Built to last by Europe's No.1 commercial vacuum cleaner manufacturer.

All-terrain Ready

With large rear wheels, pull handle and long cleaning-reach, the HZC390 is all-terrain ready, making it easy to transport across rough surfaces and up stairs. Add to this a steel head, and the HZC390 is capable of withstanding falls, drops, bangs and scrapes that can happen frequently in the professional trade environment.

Powerful & Efficient

In it for the long haul, the machine's powerful, long-life 960W motor is proven to last many, many years, delivering powerful, professional and efficient results.

Compact & Ready to Go

Compact yet capable, with a 390 container design and folding pull handle (HZC390L only), the HZC390 can be stored in the tightest of spaces.



HZC390L

- H-Class Compliant - IEC/EN 60335-2-69
- Disposable filter cartridge
- Quick, simple and safe emptying
- Compact and ready to go with extending pull handle
- 450x400x1010mm (WxLxH)


CAPACITY (L)	18	WEIGHT (KG)	11.2
POWER CORD (M)	10	POWER (Volts AC/Hz)	230 / 50/60
MOTOR (W)	960	CLEANING RANGE (M)	26.8
SUCTION H ₂ O (MM)	2500	KIT (See page 28)	AA18



HZC390S

- H-Class Compliant - IEC/EN 60335-2-69
- Disposable filter cartridge
- Quick, simple and safe emptying
- Compact and ready to go
- 450x400x600mm (WxLxH)

CAPACITY (L)	13	WEIGHT (KG)	12.2
POWER CORD (M)	10	POWER (Volts AC/Hz)	230 / 50/60
MOTOR (W)	1000	CLEANING RANGE (M)	26.8
SUCTION H ₂ O (MM)	2500	KIT (See page 28)	AA18

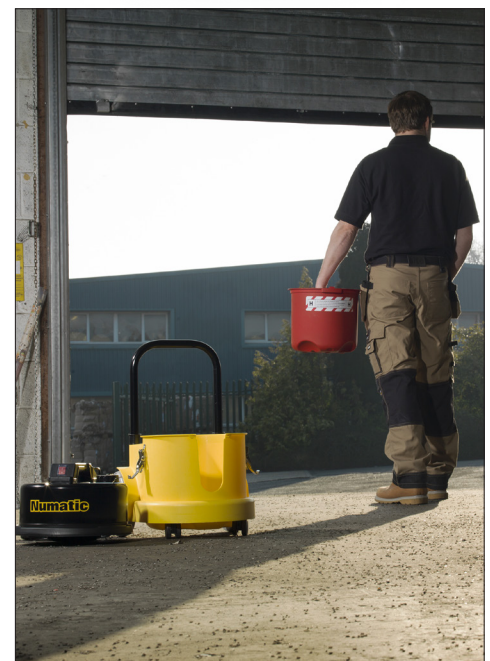

Please Note: Local regulations, safety standards and usage instructions must be upheld in order to ensure complete safety of use and fully meet the requirements of working with H-Class dusts and materials. Always seek expert advice and conduct a thorough risk assessment before use.



www.numatic.co.uk www.numatic.de www.numatic.ch www.numatic.fr www.numatic.nl www.numatic.co.za www.numatic.pt

Numatic International Limited, Chard, Somerset, TA20 2GB Tel: 01460 68600 www.numatic.com

©Numatic International Limited 2019. Specification subject to change without prior notice.